


# Adhesives & Mounting Studs for Permanent Mounting

## Adhesives

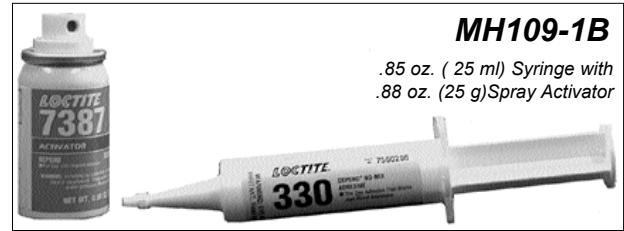

Part No.	Adhesive	Manufacturer/ Brand	Set Up Time	Thin Layer Bonding	Gap Filling	No. of Applications	Temperature Range
MH109-1A	Resin with Spray Activator	Loctite Depend	1 Minute	Yes	No	250-500	-60° to 250° F (-51° to 121° C)
MH109-1B	Resin with Spray Activator	Loctite Depend	1 Minute	Yes	No	25-50	-60° to 250° F (-51° to 121° C)
MH109-2A	2 Part Epoxy with 2 Barrel Tube Dispenser	Devcon Plastic Welder	2-3 Minutes	Yes	Yes	*2-20	-60° to 250° F (-51° to 121° C)

\* Gap filling applications require additional adhesive, and reduce the number of applications possible.

## Mounting Studs / Bolts

MH108-1B	MH108-3B	MH108-4B	MH108-5B	MH108-6B	MH108-7B	MH108-8B	MH108-9B	MH108-10B	MH108-11B
1/4-28 to 1/4-28, Stainless Steel Mounting Stud	1/4-28 to 10-32, Stainless Steel Adapter Stud	1/4-28, 1/2" length, Stainless Steel Mounting Screw	1/4-28 to M6x1, Stainless Steel Adapter Stud	1/4-28 to M8 Adapter Stud	1/4-28 to M10 Adapter Stud	1/4-28, 1 5/16" length, Stainless Steel Captive Bolt	1/4-28, 1 5/16" length, Stainless Steel Screw, socket head cap	M6x1, 33.3 mm length, Stainless Steel Captive Bolt	10-32 adapter screw, stainless steel, socket head cap, for CTC AC115 and AC230 triaxial sensors

